IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Switcher
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-HD600

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	9/19/2014	1.6.0	3.5.2	Initial version.

Driver Notes:

Control Commands & States:

Input	HDMI1	HDMI2	HDMI3
	PC	Component 1	Component 2
	SV1	SV2	CV - 1
	CV - 2		
Power Control	On	Off	

Status Available:

Connection Status	Connected	Disconnected	
Input	HDMI1	HDMI2	HDMI3
	PC	Component 1	Component 2
	SV1	SV2	CV - 1
	CV - 2		
Power Control	On	Off	

MLC60 Series Supported Commands:

Input	HDMI1	HDMI2	HDMI3
	PC	Component 1	Component 2
	SV1	SV2	CV - 1
	CV - 2		
Power Control	On	Off	

Cable and Adapter Requirements:

M/F RS-232 straight serial cable

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

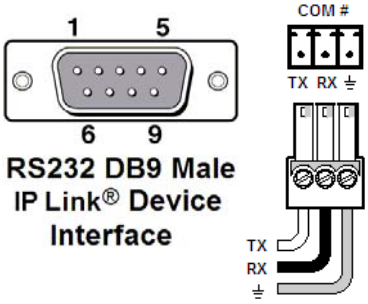

Signal	Pin	Main Cable	Pin	Signal
RxD	2	←	2	TxD
TxD	3	→	3	RxD
GND	5	—	5	GND



Note: Captive screw connector may also be used as a serial connection.

General Notes: